


Mounting Brackets WV-7010A & 7015

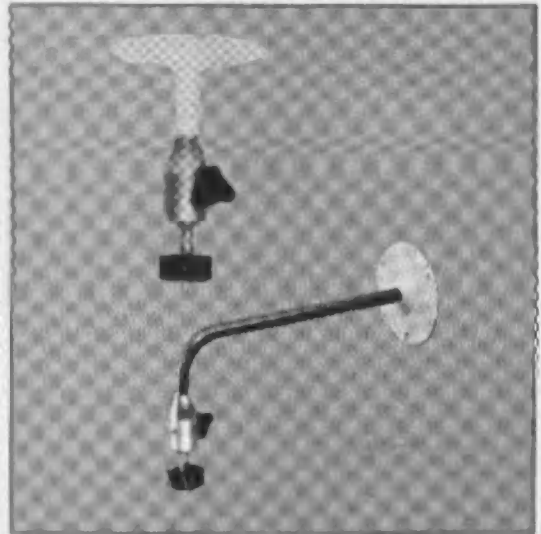

Panasonic

Before attempting to mount this product, please read these instructions.

Installation Instructions

Panasonic Industrial Company

Division of Matsushita Electric Corporation of America

CLOSED CIRCUIT VIDEO EQUIPMENT DIVISION

Executive Office: Two Panasonic Way, Secaucus, New Jersey 07094

Regional Offices

Northeast Region: 90 Meadowland Parkway, Secaucus, NJ 07094 (201) 345-7388
 Southeast Region: 8554 Shackleford Court, Suite 115, Norcross, GA 30052 (404) 905-8800
 Midwest Region: 429 E. Argonne Road, Arlington Heights, IL 60005 (312) 381-4826
 Southwest Region: 8025 Walnut Hill Lane, Irving, TX 75039 (214) 650-0248
 Western Region: 9080 Kettlewell Ave., Cypress, CA 90630 (714) 665-7388

PANASONIC PANAM INC.

51-228 Kaifu Street (aka Beach P.O. Box 774 Honolulu, Hawaii 96809-0774 (808) 953-3880

MATSUSHITA ELECTRIC OF CANADA LIMITED


6720 Ardair Drive, Mississauga, Ontario, Canada L4W 2T3 (416) 624-5210

PANASONIC SALES COMPANY

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

Ave. 66-60, Industrial Park, P.R. Victoria Industrial Park, Carolina, Puerto Rico 00980 (809) 750-4000

■ ASSEMBLING

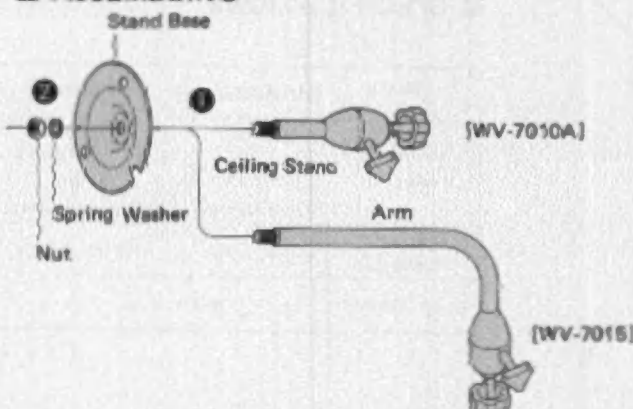

- 1 Insert the Ceiling Stand or Arm into the Stand Base.
- 2 Rock them with Spring Washer and Nut tightly.

PANASONIC INDUSTRIAL COMPANY, PH1 or PSC will repair and exchange parts for this product free of charge in the U.S.A. and Puerto Rico in the event of a manufacturing defect. New or comparable rebuilt parts in exchange for defective parts for one(1) year after original purchase.

G0987-0 YWV8QA1376AN

Printed in Japan


5 1

■ INSTALLATION PRECAUTIONS:


- The mounting brackets model WV-7010A and WV-7015 were designed for indoor use and can support any CCTV camera. For example, Panasonic CCTV camera models WV-140/144/1410/1414/1460/1464/1500/1504/1550/1554, even when installed in the Panasonic camera-housing model WV-7120.
- Combined weight of any CCTV camera, lens and housing must not exceed 9 lbs. (4 kg).
- Select the location where the camera weight can be properly supported and firmly attach the bracket to plywood, gypsum board or plaster board. Do not mount a camera housing and camera on these brackets that exceed 9lbs. (4 kg) in combined weight.

■ INSTALLATION

- 1 Make holes according to the actual size pattern and mount the bracket.
 1. Plot the points (A, B, C) for making holes.
 2. Make three preliminary holes.
 3. Fix the bracket with three screws (not provided).
- 2 Mount the camera with Camera Mounting Screw ①.
- 3 Adjust the camera direction with Pan/Tilt Adjusting Screw ②.

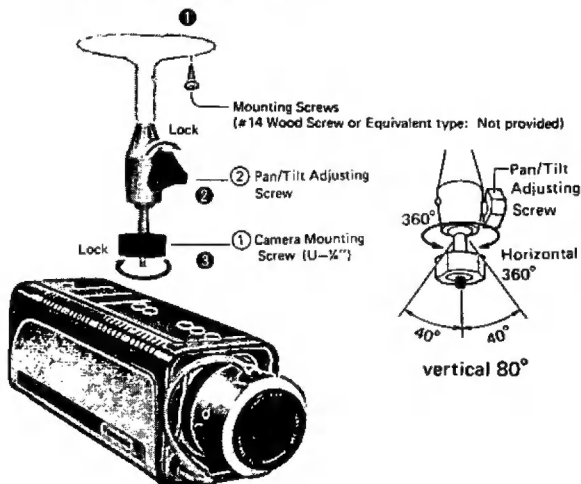

↑ Up side (WV-7015)

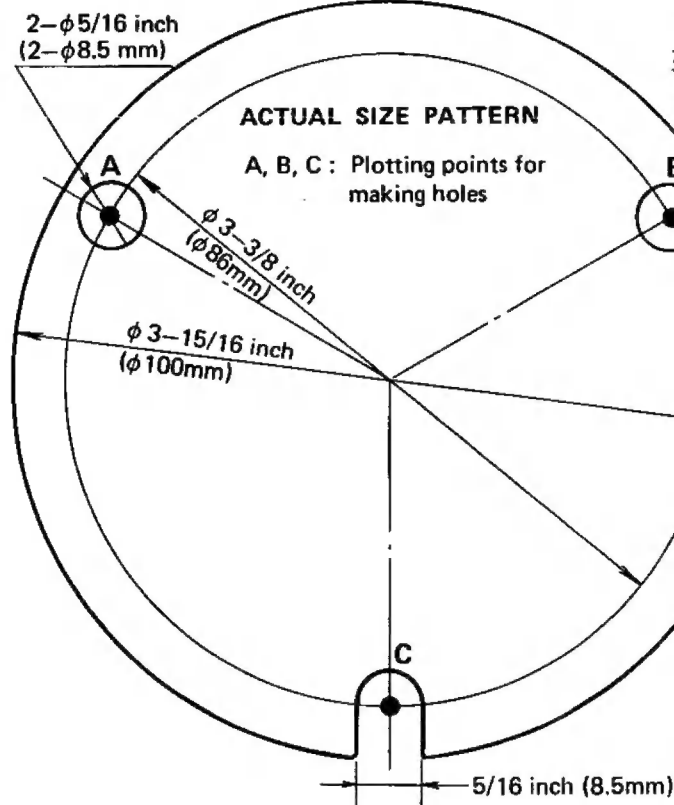

■ PREFACE

WV-7010 – Ceiling Mount:

Indoor use – will hold camera with fixed focal lens and camerahousing model WV-7120, for mounting on ceiling or stand, comes with universal head for multi-directional viewing. Holds up to 9 lbs. (4kg).

WV-7015 – Wall Mount:

Indoor use – will hold camera with fixed focal lens and camerahousing on wall, comes with universal head for multi-directional viewing. Holds up to 9 lbs. (4 kg).

■ SPECIFICATIONS

Model	WV-7010A	WV-7015
Dimensions (HxWxD)	Approx. 5-7/8" x φ3-15/16" 149xφ100 (mm)	Approx. 7-1/2" x 3-15/16" x 10-5/8" 190x100x270 (mm)
Weight (Approx.)	0.7 lbs, 320g	1.39 lbs, 630g
Load Weight	9 lbs, 4 kg	